




- Quick quotation
- Easy to order
- Competitive delivery

Even more possibilities thanks to tailored design!


If you do not find what you need in our comprehensive standard programme, choose the tool shape you require and we will tailor it for you to *your* dimensions.

Coromant Capto® adaptors

Bolt clamp

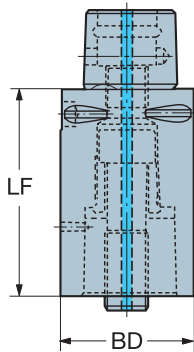

Segment clamp (QC)




The maximum LF is 3 times the coupling diameter. Exception:


Coromant Capto and HSK
Max. LF 200 mm (7.874 inch).

Taper
Max. LF 150 mm (5.906 inch).


Design version

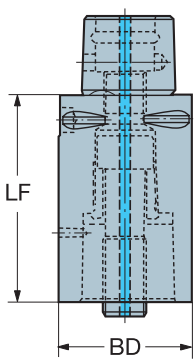

Cylindrical

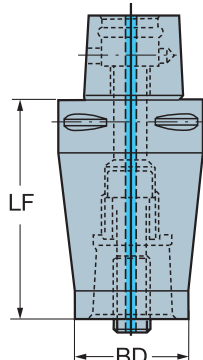

Conical

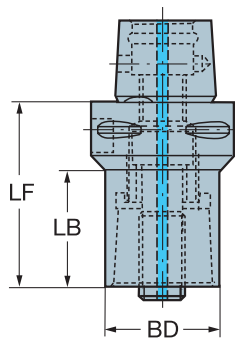

HD conical

Rotated polygon


0°



90°



180°



270°



Can not always be offered due to coupling size

Options

Note: For specific details regarding the options, contact your Sandvik Coromant sales representative.

Coupling type machine side	Coromant Capto, HSK, Steep taper, BIG-PLUS, DIN 2080, NMTB
Coupling size machine side	C3-C10, HSK-A/C 40, 50, 63, 80, 100, 125, 160, HSK-F 80, HSK-A/C/T 40, 63, 100, Taper 30-60
Coupling size tool side	C3-C10
Clamping type	Bolt or QC
Design type (Only CAT-V)	ASME B5.50-1985, ASME B5.50-2009
Application type	Milling or Turning/Boring
Design version	Cylindrical, Conical or HD conical
Length version	Normal or short (segment clamping only)
Programming lengths LF	mm
Body length LB	mm
Body width BD	mm
Data carrier	Yes or No
Tolerance LF	Standard, extra close
Rotated polygon	Standard (0 degrees), 90, 180, 270 degrees



Coromant Capto® adaptors

Inquiry/ordering No.

Customer	Customer No. (Coromant internal)	Date
Street	Telephone	Customer attention
Post Code/City/State	Telefax	Issuer
Quantity	Customer denomination	

State nearest standard catalogue code, see main catalogue or supplement catalogue

Bolt - -

QC - - -

Your value/
Your choice

State only your options deviating from the above standard

Coupling type machine side	Coromant Capto, HSK, Steep taper, BIG-PLUS, DIN 2080, NMTB	<input type="text"/>
Coupling size machine side	C3-C10, HSK-A/C 40, 50, 63, 80, 100, 125, 160, HSK-F 80, HSK-A/C/T 40, 63, 100, Taper 30-60	<input type="text"/>
Coupling size tool side	C3-C10	<input type="text"/>
Clamping type	Bolt or QC	<input type="text"/>
Design type (Only CAT-V)	ASME B5.50-1985, ASME B5.50-2009	<input type="text"/>
Application type	Milling or Turning/Boring	<input type="text"/>
Design version	Cylindrical, Conical or HD conical	<input type="text"/>
Length version	Normal or short (segment clamping only)	<input type="text"/>
Programming lengths LF	_____ mm	<input type="text"/>
Body length LB	_____ mm	<input type="text"/>
Body width BD	_____ mm	<input type="text"/>
Data carrier	Yes or No	<input type="text"/>
Tolerance LF	Standard, extra close	<input type="text"/>
Rotated polygon	Standard (0 degrees), 90, 180, 270 degrees	<input type="text"/>
		<input type="text"/>

Form No. C-1250-026-ENG
Family code = H460
CoroPak 16.1



The value/choice must be given
If no value/choice is specified, it will be recommended by the system